


1000 / 32 Proair
Description

7.1
7.3



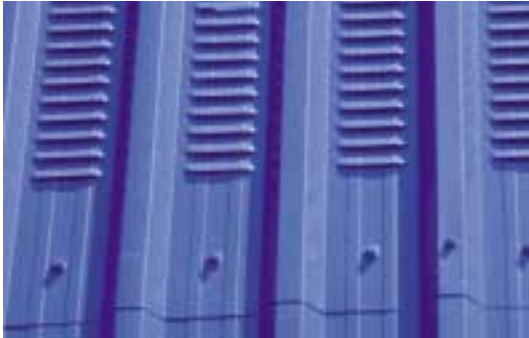

Left :
Typical view of Proair™ sheet profile



Middle :
View of Building Duggan Steel (Irl.) Ltd.,
showing Proair™

Bottom Right :
View of reverse of Proair™





Left :
Typical view of Proair™ sheet profile



Middle :
External view of Equestrian Centre.

Bottom Right :
Internal view of Equestrian Centre showing
Proair™ sheet.




EU Profiles Proair™ louvring system can be applied to any of the 32mm profile products detailed in this manual. These include Proclad®, Procolor®, Proliner™ and Prodeck™.

Louvring can be provided for material thickness from 0.40mm to 0.70mm.

Proair™ is manufactured to your specific length requirements.

During testing of the products airflow capabilities, in the Dublin Institute of Technology wind tunnel testing facilities, airflow rates of up to 30% were achieved. These airflow rates are up to 5 times higher than other ventilated products tested.

Should you require further information regarding the suitability of louvring for your application, please contact our Sales Department.

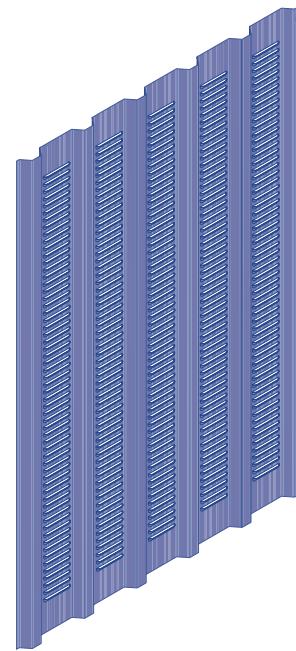

All dimensions are subject to roll forming tolerances.

